Customer:	Project:

Colour:	Finish:

Mark	Length	Width	Qty	Mold Details
A	48"	24"		

Concrete:
- ultimate 28 day compressive strength fc' shall not be less than 35MPa
- stripping compressive strength shall not be less than 10MPa
- durability shall be class of exposure F2
- maximum aggregate size of 14 mm.
- maximum water/cement ratio of 0.45
- air entrainment of 5-7%
- reinforcing steel shall be deformed steel bars having a minimum yield strength of 400MPa conforming to CSA G30.18
- all concrete work shall conform to CSA-A23.1, A23.2, A23.3 and A23.4
- minimum cover on rebar shall be as shown on the drawing but must not be ANY LESS THAN 17mm (11/16")
- all tolerances according to CSA A23.4-09 Clause 12

Design Loads:
- self weight only

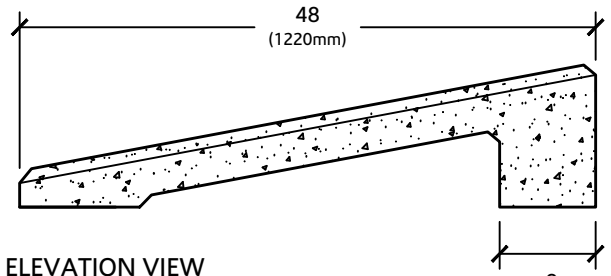

ELEVATION VIEW

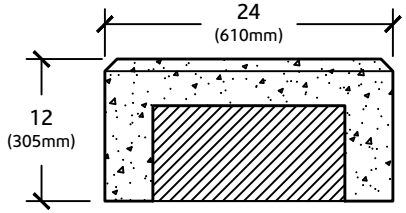

END VIEW

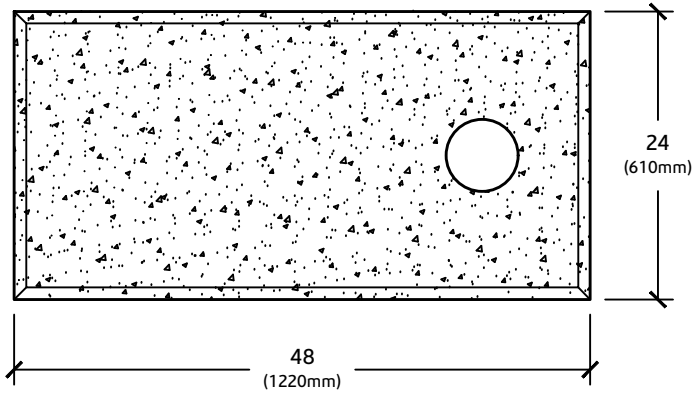

PLAN VIEW

EDS CONCRETE PRODUCTS

Piece: CORN - RECREATION CORN HOLE

Date: 6/10/21

Detailer: B.O.

Scale: 3/4"=1'